

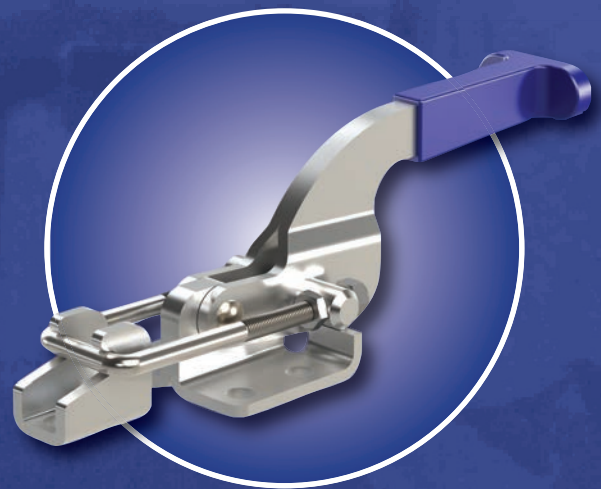
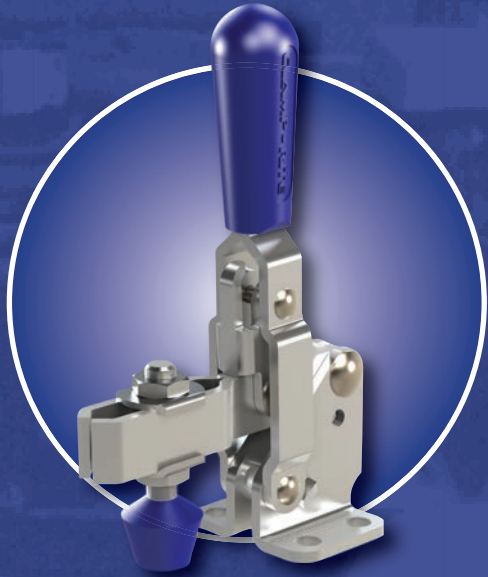
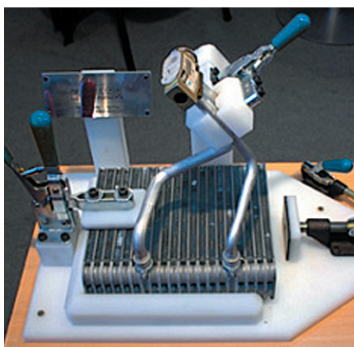
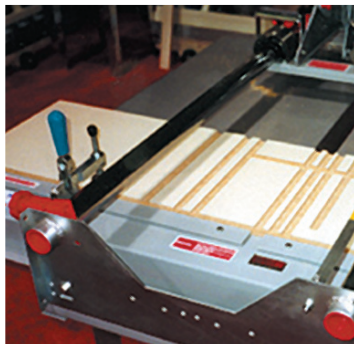


Right Clamp. Right Price. Right Now.

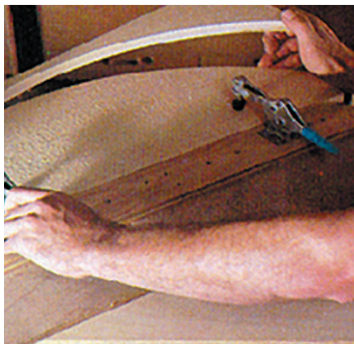

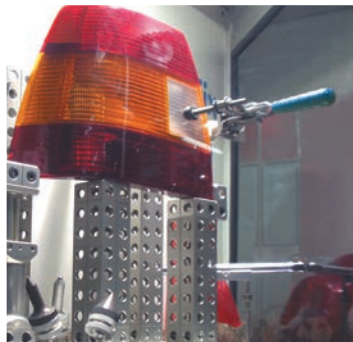

Vertikálne upínače

Model 1101	4
Model 1102	5
Model 1107	6
Model 1110	7
Model 1147	8
Model 1167	9
Model 1117	10

Horizontálne upínače

Model 1405	11
Model 1415	11
Model 1425	12
Model 1435	12
Model 1605	13

Uzáverové / hákové upínače

Model 1223	14
Model 1275	15
Model 1224	16
Model 1251	17
Model 1201	18

Ojnicové / Priamočiare upínače

Model 1301	18
Model 1302	19
Model 1305	20
Model 1303	20
Model 1309	21
Model 1310	21
Model 1307	22



Vysokozátlačové upínače

Model 1150	23
Model 1159	24
Model 1350	25
Model 1450	26

Príslušenstvo	27
---------------------	----

Model 1101

Špecifikácia

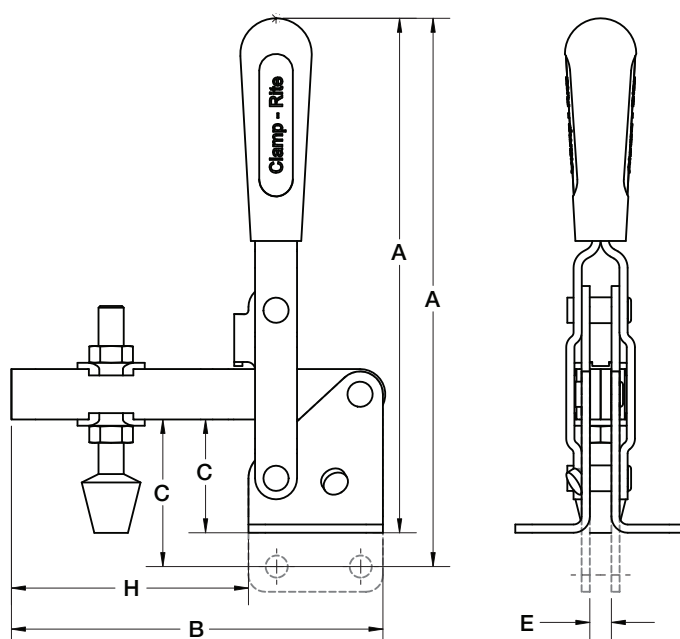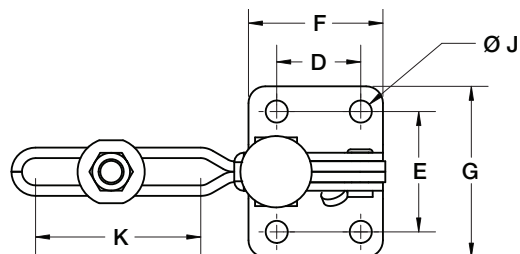
Uhol otvorenia ramena: **110°**Uhol otvorenia rukoväte: **61°**Dodávaná prítlačná skrutka: **19525CR**Zvislá pätká
11012CR

11011CR


Model	Sila upnutia	Hmotnosť	Popis	A	B	C	D	E	F	G	H	J	K
	N/lb.	Kg/lb.											
				mm/in.									
11011CR	440	0.7	Vodorovná pätká, U-rameno	77	52	15.8	15.7	24	25.4	33.5	26.6	4.5	18.5
	100	0.15		3.03	2.05	0.62	0.62	0.94	1.00	1.32	1.05	0.18	0.73
11012CR	440	0.7	Zvislá pätká, U-rameno	83.5	52	22.4	15.7	3.8	25.4	-	26.6	4.5	18.5
	100	0.15		3.29	2.05	0.88	0.62	0.15	1.00	-	1.05	0.18	0.73

Model **1102**

Špecifikácia

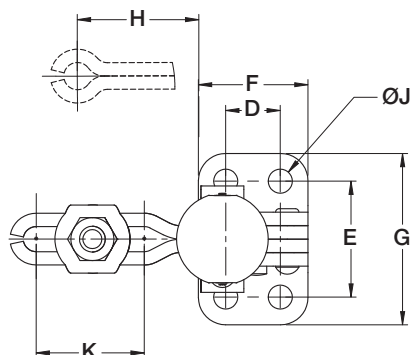Uhol otvorenia ramena: **96°**Uhol otvorenia rukoväte: **62°**Dodávaná prítlačná skrutka: **19630CR**Zvislá päťka
11022CR
11025CRPevné rameno
11020CR

11021CR

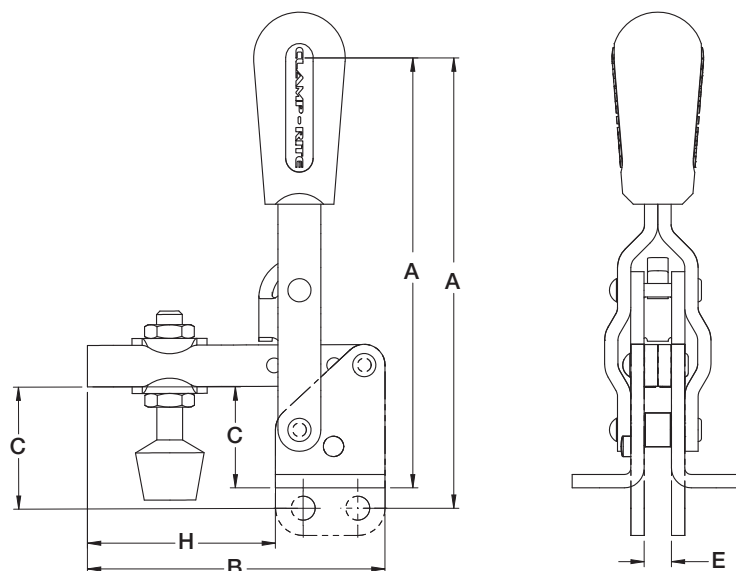

Model	Sila upnutia	Hmotnosť	Popis	A	B	C	D	E	F	G	H	J	K
	N/lb.	Kg/lb.		mm/in.									
11020CR	890	0,16	Vodorovná päťka,	110.7	58.7	23.7	12.7	27	25.5	39.9	27.1	5.6	-
	200	0.35	Pevné rameno	4.36	2.31	0.93	0.5	1.06	1.00	1.57	1.07	0.22	-
11021CR	890	0,16	Vodorovná päťka,	110.7	69.2	23.5	12.7	27	25.5	39.9	43.7	5.6	25.1
	200	0.35	U-rameno	4.36	2.73	0.92	0.5	1.06	1.00	1.57	1.72	0.22	0.99
11022CR	890	0,16	Zvislá päťka,	115.5	69.2	28.2	12.7	6.4	25.5	-	43.7	5.6	25.1
	200	0.35	U-rameno	4.55	2.73	1.11	0.5	0.25	1.00	-	1.72	0.22	0.99
11025CR	890	0,16	Zvislá päťka,	115.5	58.7	28.2	12.7	6.4	25.5	-	27.1	5.6	-
	200	0.35	Pevné rameno	4.55	2.31	1.11	0.5	0.25	1.00	-	1.07	0.22	-

Model **1107**




Špecifikácia

Uhol otvorenia ramena: **102°**Uhol otvorenia rukoväte: **57°**Dodávaná prítlačná skrutka:* **19835CR**

*len pre verzie s U-ramenom

Zvislá päťka
11072CRPevné rameno
11074CRT-rukoväť
11073CR

11011CR

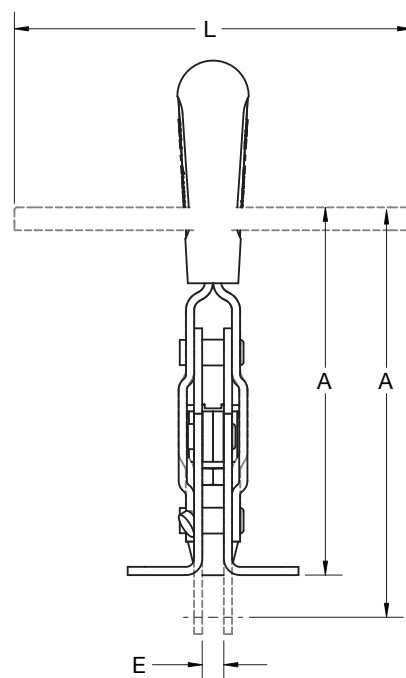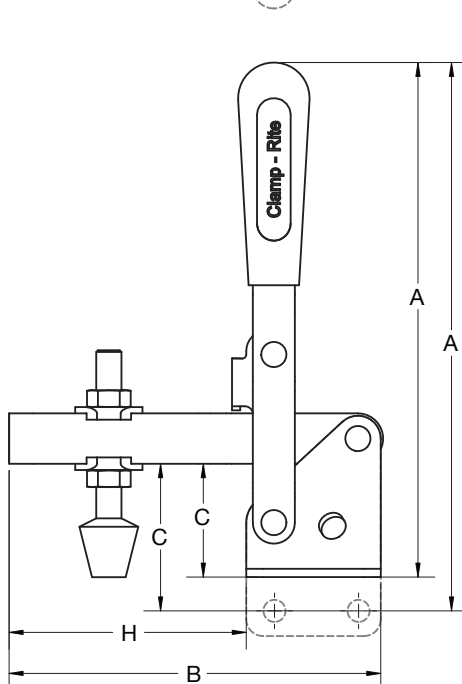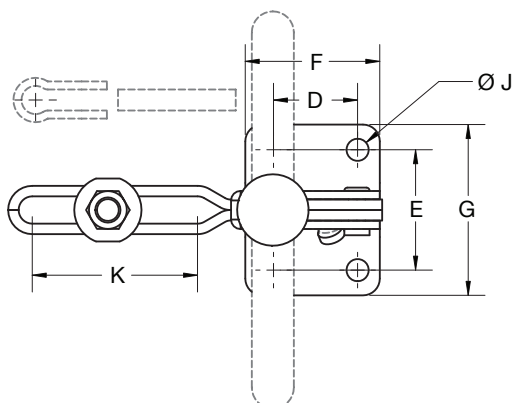


Model	Sila upnutia	Hmotnosť	Popis	A	B	C	D	E	F	G	H	J	K
	N/lb.	Kg/lb.											
	mm/in.												
11018CR	1670	0.30	Vodorovná päťka,	143.2	137.1	31.9	19.1	31.8	35.1	44.6	97.5	7.1	76.2
	375	0.67	U-rameno	5.64	5.4	1.26	0.75	1.25	1.38	1.75	3.84	0.28	3.00
11071CR	1670	0.30	Vodorovná päťka,	143.2	111.7	31.9	19.1	31.8	35.1	44.6	72.1	7.1	50.8
	375	0.67	U-rameno	5.64	4.4	1.26	0.75	1.25	1.38	1.75	2.84	0.28	2.00
11072CR	1670	0.35	Zvislá päťka,	150.8	111.7	39.3	19.1	6.4	35.1	-	72.1	7.1	50.8
	375	0.78	U-rameno	5.94	4.40	1.55	0.75	0.25	1.38	-	2.84	0.28	2.00
11073CR	1670	0.37	Vodorovná päťka,	104.1	116.8	31.2	19.1	31.8	35.1	45.0	72.4	6.9	53.3
	375	0.82	U-rameno, T-rukoväť	4.10	4.60	1.23	0.75	1.25	1.38	1.77	2.85	0.27	2.10
11074CR	2220	0.34	Vodorovná päťka,	143.2	95.9	31.8	19.1	31.8	35.1	44.6	56.3	7.1	-
	500	0.75	Pevné rameno	5.64	3.78	1.25	0.75	1.25	1.38	1.75	2.22	0.28	-

Model **1110**



Špecifikácia

Uhol otvorenia ramena: **110°**Uhol otvorenia rukoväte: **60°**Dodávaná prítlačná skrutka:* **19055CR**

*len pre verzie s U-ramenom

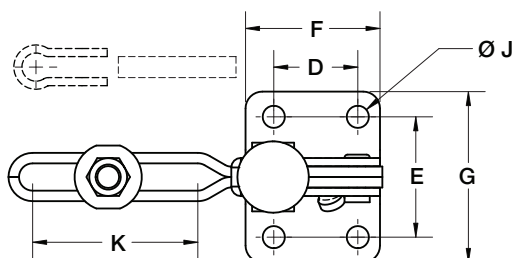Zvislá päťka
11107CRPevné rameno
11104CR
11107CR

11101CR

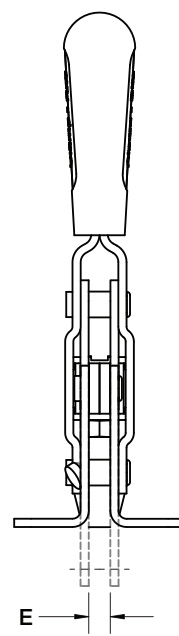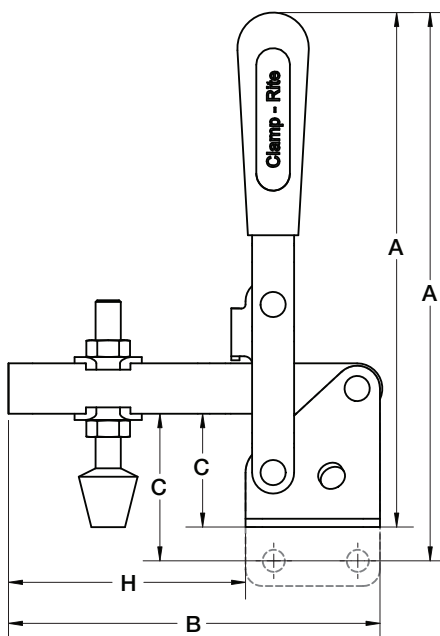




Model	Sila upnutia	Hmotnosť	Popis	A	B	C	D	E	F	G	H	J	K
	N/lb.	Kg/lb.											
				mm/in.									
11101CR	2670	0.59	Vodorovná päťka,	196	139.4	42.4	31.8	45.2	49.3	64.5	90.2	8.3	59.4
	600	1.29	U-rameno	7.71	5.49	1.67	1.25	1.78	1.94	2.54	3.55	0.33	2.34
11104CR	3340	0.68	Vodorovná päťka,	196	138	43	31.8	45.2	49.3	64.5	88.7	8.3	-
	750	1.5	Pevné rameno	7.71	5.43	1.69	1.25	1.78	1.94	2.54	3.49	0.33	-
11107CR	3340	0.68	Zvislá päťka,	213.6	138	60.5	31.8	7.9	49.3	-	88.7	8.3	-
	750	1.5	Pevné rameno	8.41	5.43	2.38	1.25	0.31	1.94	-	3.49	0.33	-

Model **1147**

Špecifikácia


Uhol otvorenia ramena: **96°-135°**Uhol otvorenia rukoväte: **67°-70°**Dodávaná prítlačná skrutka:* **19310CR**

*len pre verzie s U-ramenom

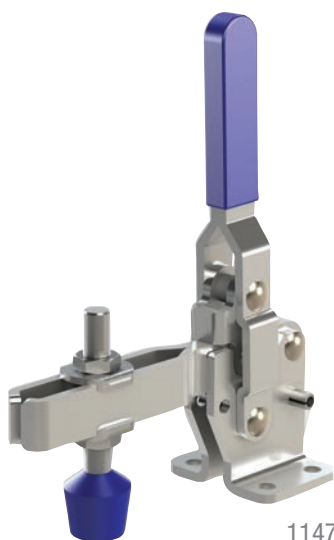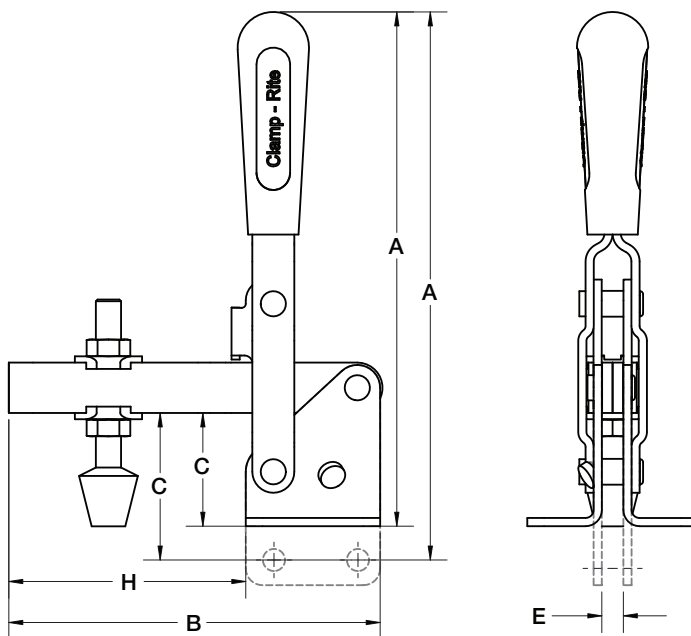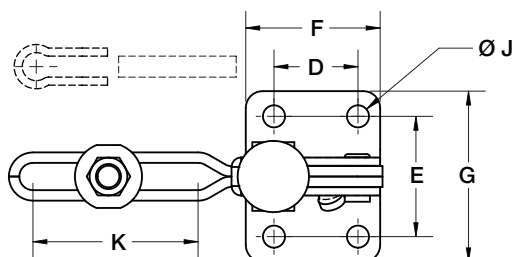Pevné rameno
11474CR

11471CR

Model	Sila upnutia	Hmotnosť	Popis	A	B	C	D	E	F	G	H	J	K
	N/lb.	Kg/lb.		mm/in.									
11471CR	4400	1.24	Vodorovná päťka, U-rameno	223.8	175.0	49.5	31.8	45.0	50.8	65.0	123.7	8.9	75.7
	1000	2.76		8.81	6.89	1.95	1.25	1.77	2.00	2.56	4.87	0.35	2.98
11474CR	4400	1.24	Vodorovná päťka, Pevné rameno	223.8	180.9	50.8	31.8	45.0	50.8	65.0	130.1	8.9	-
	1000	2.76		8.81	7.12	2.00	1.25	1.77	2.00	2.56	5.12	0.35	-

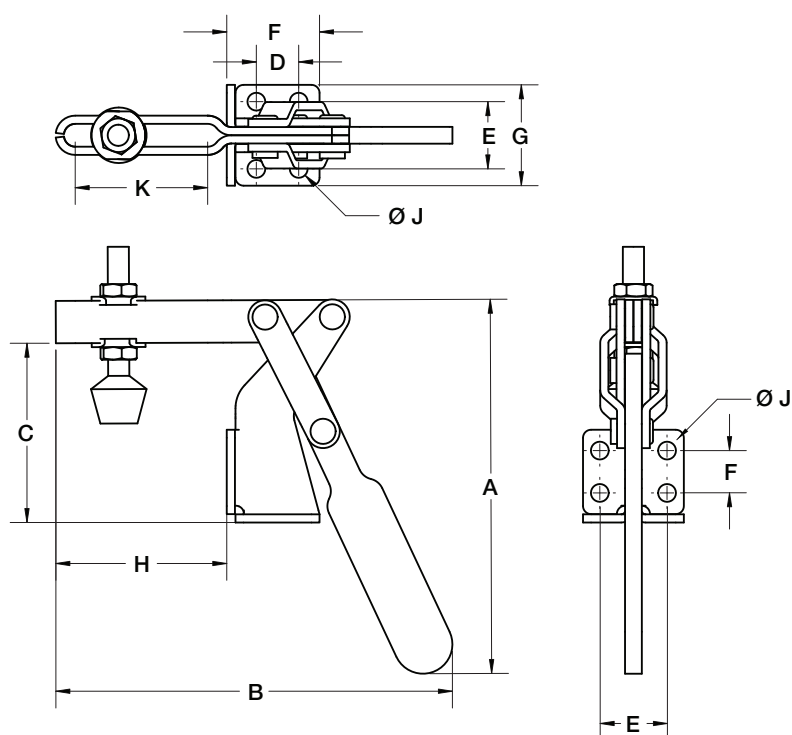Model **1117****Špecifikácia**Uhol otvorenia ramena: **180°**Uhol otvorenia rukoväte: **60°**Dodávaná prítlačná skrutka: **19835CR**

11170CR

Model	Sila upnutia	Hmotnosť	Popis	A	B	C	D	E	F	G	H	J	K
	N/lb.	Kg/lb.											
	mm/in.												
11170CR	1670	0.40	Vodorovná pätká,	161.8	156.1	71.1	16.0	25.4	35.1	38.1	65.5	6.7	53.6
	375	0.88	U-rameno	6.37	6.14	2.8	0.63	1.00	1.38	1.50	2.58	.026	2.11


Model 1405

Špecifikácia

Uhol otvorenia ramena: **90°**

Uhol otvorenia rukoväte: **50°**

Dodávaná prítlačná skrutka: **19420CR**

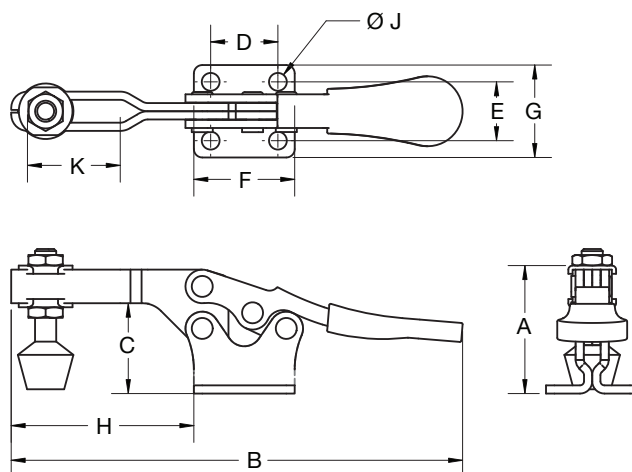

Model	Sila upnutia	Hmotnosť	Popis	A	B	C	D	E	F	G	H	J	K
	N/lb.	Kg/lb.											
	mm/in.												
14051CR	270	0,03	Vodorovná päťka, U-rameno	17.3	82.7	7.4	13.5	15.7	23.8	23.7	18.9	4.4	9.5
	60	0.06		0.68	3.26	0.29	0.53	0.62	0.94	0.93	0.74	0.18	0.37
14054CR	270	0,03	Vodorovná päťka, Pevné rameno	17.3	86.5	9	13.5	15.7	23.8	23.7	18	4.4	-
	60	0.06		0.68	3.40	0.35	0.53	0.62	0.94	0.93	0.71	0.18	-


Model 1415

Špecifikácia

Uhol otvorenia ramena: **84°**

Uhol otvorenia rukoväte: **70°**


Dodávaná prítlačná skrutka: **19630CR**

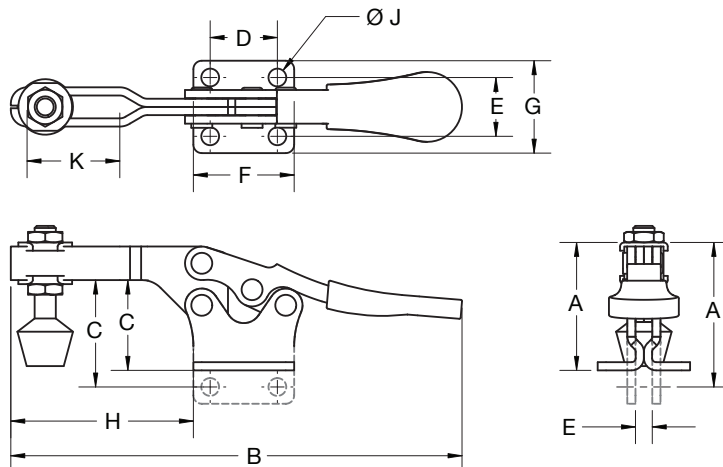

Model	Sila upnutia	Hmotnosť	Popis	A	B	C	D	E	F	G	H	J	K
	N/lb.	Kg/lb.											
	mm/in.												
14151CR	890	0,15	Vodorovná päťka, U-rameno	38.9	142.6	25.6	25.4	22.3	36.5	35	56.3	5.2	31.1
	200	0.34		1.53	5.61	1.01	1.00	0.88	1.44	1.38	2.22	0.2	1.23
14152CR	890	0,15	Zvislá päťka, U-rameno	44.6	142.6	37.7	26.2	4	36.5	-	56.3	5.2	31.1
	200	0.34		1.76	5.61	1.48	1.03	0.16	1.44	-	2.22	0.2	1.23

Model **1425**


Špecifikácia

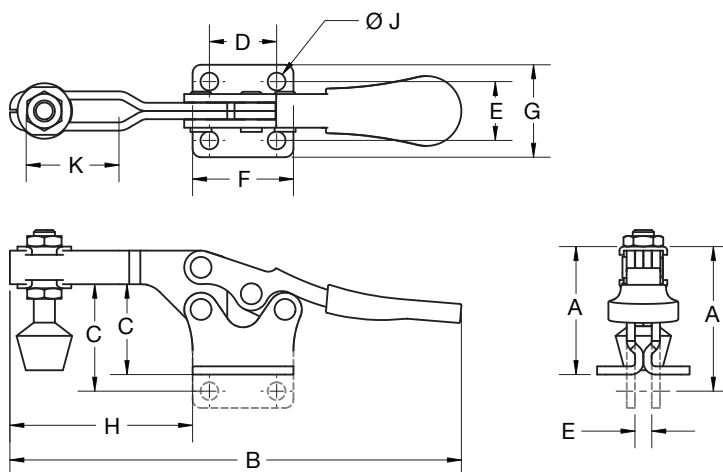Uhol otvorenia ramena: **92°**Uhol otvorenia rukoväte: **70°**Dodávaná prítlačná skrutka: **19835CR**

Model	Sila upnutia	Hmotnosť	Popis	A	B	C	D	E	F	G	H	J	K
	N/lb.	Kg/lb.		mm/in.									
14251CR	2220	0.25	Vodorovná pätká, U-rameno	46.8	170	32.9	25.4	22.1	38.1	34.8	69.2	6.7	35
	500	0.55		1.84	6.69	1.3	1.00	0.87	1.50	1.37	2.72	0.27	1.38
14252CR	2220	0.25	Zvislá pätká, U-rameno	53.2	170	39.3	25.4	6.2	38.1	-	69.2	6.7	35
	500	0.55		2.09	6.69	1.55	1.00	0.24	1.50	-	2.72	0.27	1.38

Model **1435**

Špecifikácia

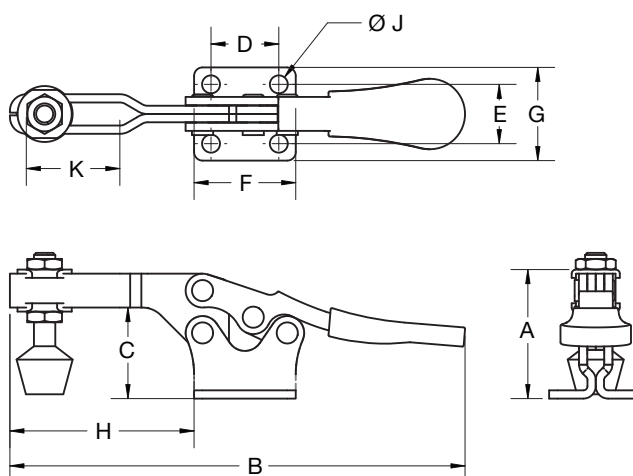Uhol otvorenia ramena: **92°**Uhol otvorenia rukoväte: **50°**Dodávaná prítlačná skrutka: **19055CR**

Model	Sila upnutia	Hmotnosť	Popis	A	B	C	D	E	F	G	H	J	K
	N/lb.	Kg/lb.		mm/in.									
14351CR	3340	0.67	Vodorovná pätká, U-rameno	64.9	247.9	43.3	41.3	41.2	57.2	57.2	109.2	8.4	60.2
	750	1.47		2.55	9.76	1.7	1.63	1.62	2.25	2.25	4.3	0.33	2.37


Model 1605

Špecifikácia

Uhol otvorenia ramena: **90°**

Uhol otvorenia rukoväte: **170°**

Dodávaná prítlačná skrutka: **19525CR**

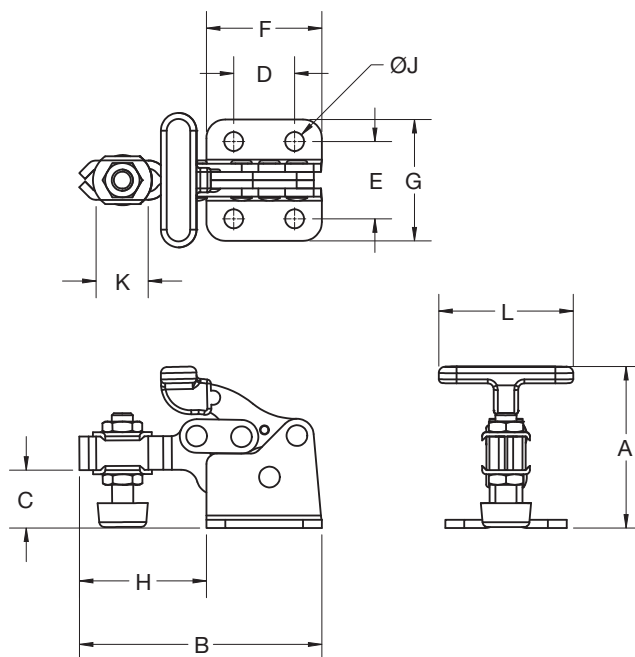




16051CR

Model	Sila upnutia	Hmotnosť	Popis	A	B	C	D	E	F	G	H	J	K	L
	N/lb.	Kg/lb.												
				mm/in.										
16051CR	670	0,06	Vodorovná pätká,	35.7	56.4	12.3	13.5	15.7	26.2	25.1	30.3	4.6	12.7	28.45
	150	0.13	U-rameno	1.41	2.22	0.48	0.53	0.62	1.03	0.99	1.19	0.18	0.5	1.12
16071CR	1560	0.24	Vodorovná pätká,	61	91.7	22	23	29.2	43.7	45.9	48	7.1	19	51
	350	0.54	U-rameno	2.40	3.61	0.87	0.91	1.15	1.72	1.81	1.89	0.28	0.75	2.00
16091CR	3340	0.27	Vodorovná pätká,	92.7	135.4	33.3	35.1	38.1	64	63	71.4	7.9	33.5	63
	750	0.59	U-rameno	3.65	5.33	1.31	1.38	1.50	2.52	2.48	2.81	0.31	1.32	2.48

Model **1223**

Špecifikácia

Zdvih:	mm [in.]
12230	46.0 [1.81]
12310	44.5 [1.75]
12410	63.5 [2.50]

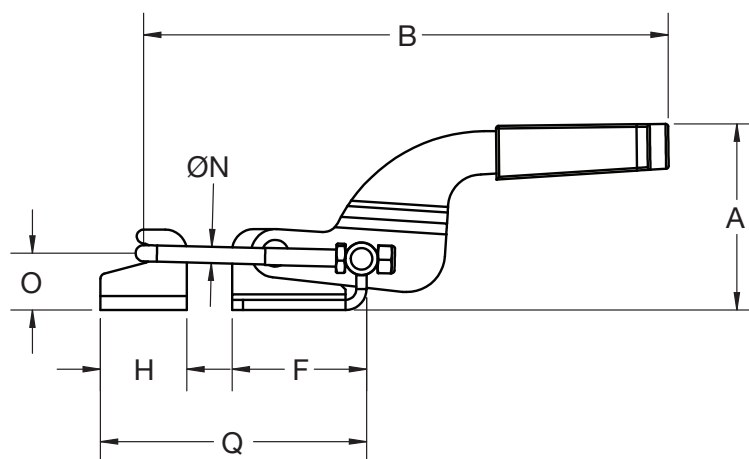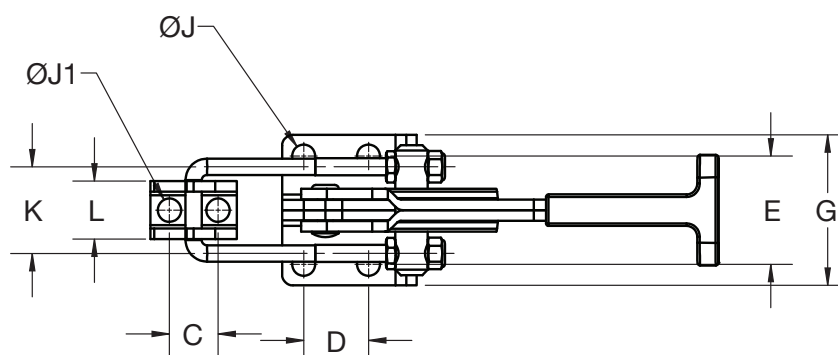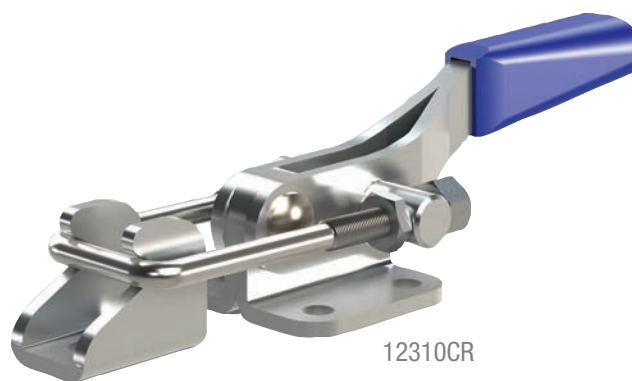

Model	Sila upnutia	Hmotnosť	A	B	C	D	E	F	G	H	J	J1	K	L	N	O	Q (MIN)	Q (MAX)
	N/lb.	Kg/lb.	mm/in.															
12230CR	1600	0,07	28	97.2	10	16	19	26	28	20	4.2	4.2	19	13.2	3.3	12	46	57.2
	360	0.15	1.10	3.83	0.39	0.63	0.75	1.02	1.10	0.79	0.17	0.17	0.75	0.52	0.13	0.47	1.81	2.25
12310CR	3200	0,25	54.5	154.1	14.3	19.1	31.8	39.5	44.1	25.4	6.7	6.9	25.4	17	4.8	16.7	64.9	78.2
	700	0.56	2.15	6.07	0.56	0.75	1.25	1.56	1.74	1.00	0.27	0.27	1.00	0.67	0.19	0.66	2.56	3.08
12410CR	8900	0,65	73.4	188.1	19.1	41.3	38.1	60.5	53.8	38.1	8.5	8.5	44.5	30.1	7.9	23.8	98.6	114.3
	2000	1.43	2.89	7.41	0.75	1.63	1.5	2.38	2.12	1.5	0.33	0.33	1.75	1.19	0.31	0.94	3.88	4.5


Model 1224

Špecifikácia

Zdvih:	mm [in.]
12240	38.9 [1.53]
12340	50.8 [2.00]
12440	63.5 [2.50]



12340CR


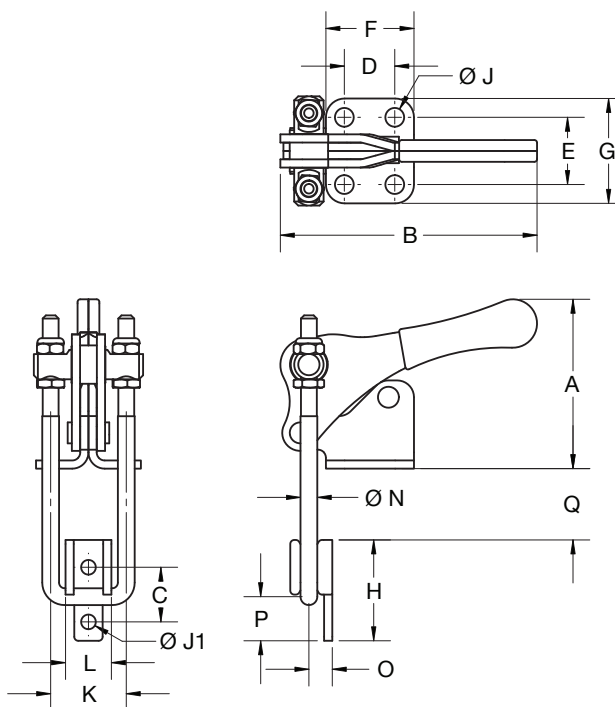


Model	Sila upnutia	Hmotnosť	A	B	C	D	E	F	G	H	J	J1	K	L	N	O	P	Q (MIN)	Q (MAX)
	N/lb.	Kg/lb.	mm/in.																
12240CR	1.6kN	0.11	51.4	88.3	14.3	12.7	22.4	25.4	35.1	25.4	5.2	4.4	20.6	13.3	3.5	4.7	11.1	12.95	23.4
	360	0.25	2.03	3.48	0.56	0.5	0.88	1.00	1.38	1.00	0.20	0.17	0.81	0.52	0.14	0.19	0.44	0.51	0.92
12340CR	3.1kN	0.27	63.9	103	20.6	19.1	25.4	33.3	39.6	38.1	7.1	5.6	28.6	17.3	6.4	8.8	16.7	16	34.1
	700	0.55	2.52	4.06	0.81	0.75	1.00	1.31	1.56	1.50	0.28	0.22	1.13	0.68	0.25	0.35	0.66	0.63	1.34
12440CR	8.9kN	0.70	91.4	133.4	26.9	31.8	37.3	47.2	53.6	54.1	8.6	8.9	44.2	30.2	7.9	12.7	20.1	54.4	53.6
	2,000	1.54	3.60	5.25	1.06	1.25	1.47	1.86	2.11	2.13	0.34	0.35	1.74	1.19	0.31	0.50	0.79	2.14	2.11

Model **1251**

Špecifikácia

Zdvih:	mm [in.]
12510	101.6 [4.00]
12515	101.6 [4.00]
12710	136.7 [5.38]
12810	155.7 [6.13]

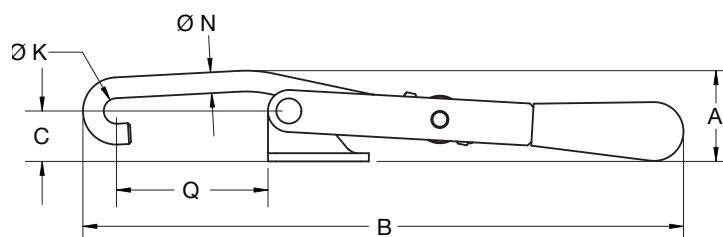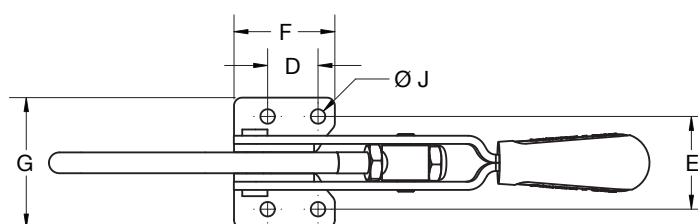

Model	Sila upnutia	Hmotnosť	A	B	C	D	E	F	G	J	K	N	Q (MIN)	Q (MAX)
	N/lb.	Kg/lb.	mm/in.											
12510CR	1670	0,28	32.9	214	15.5	19.1	34.7	38.1	48.9	5.5	9.7	7.9	43.6	54.6
	375	0.61	1.29	8.42	0.61	0.75	1.37	1.50	1.93	0.22	0.38	0.31	1.72	2.15
12515CR	1670	0,28	35.7	216.9	17.3	38.1	-	50.8	14.2	6.7	9.7	7.9	30.9	42.4
	375	0.61	1.41	8.54	0.68	1.50	-	2.00	0.56	0.27	0.38	0.31	1.22	1.67
12710CR	3340	0.62	55.1	298.5	34.5	31.8	49	47.2	66.3	8.9	12.7	9.5	68.6	87.4
	750	1.38	2.17	11.75	1.36	1.25	1.93	1.86	2.61	0.35	0.50	0.37	2.70	3.44
12810CR	4450	1.12	64.3	350.5	39.6	28.7	63.2	54.1	89	10	14.7	13	69.9	91.4
	1000	2.49	2.53	13.80	1.56	1.13	2.49	2.13	3.50	0.39	0.58	0.51	2.75	3.60


Špecifikácia



Model	Sila upnutia	Hmotnosť	A	B	D	E	F	G	J	K	N	O
	N/lb.	Kg/lb.	mm/in.									
12010CR	1670	0.31	47.8	213.4	19	31	35.1	43.7	7.1	14.2	3	40.4
	375	0.68	1.88	8.4	0.75	1.22	1.38	1.72	0.28	0.56	0.12	1.59

Ojnicové/Priamočiare upínače

Model	Zdvih	Prítlačná skrutka (dodávaná)
	mm/in.	
13010CR	16 0.63	19105CR
13010CRM	16 0.63	19421CR

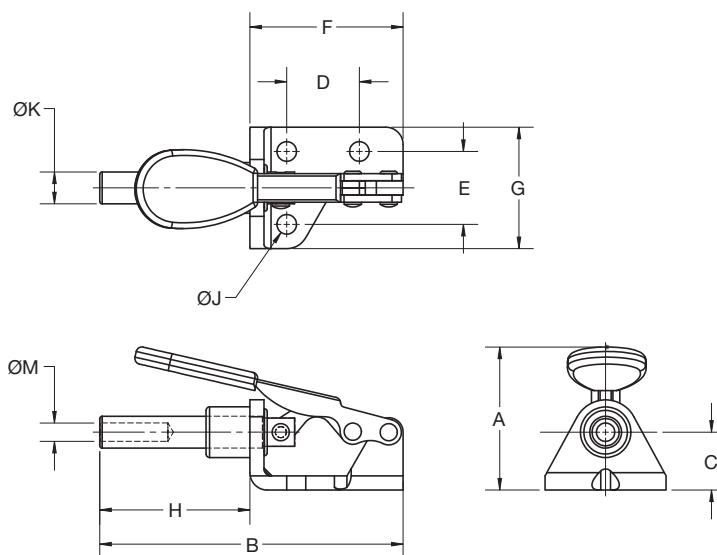


Model	Sila upnutia	Hmotnosť	Popis	A	B	C	D	E	F	G	J	K	M
	N	Kg		mm									
13010CR	440	0,04	Vodorovná päťka,	39.1	66.9	12.7	16	16	33.8	26.7	4.3	6.2	#8-32
	100	0.09	Imperiálny závit	1.54	2.63	0.5	0.63	0.63	1.33	1.05	0.17	0.25	
13010CRM	440	0,04	Vodorovná päťka,	39.1	66.9	12.7	16	16	33.8	26.7	4.3	6.2	M4
	100	0.09	Metrický závit	1.54	2.63	0.5	0.63	0.63	1.33	1.05	0.17	0.25	

Model **1302**

Model	Zdvih mm/in.	Prítláčná skrutka (dodávaná)
13020CR	19 0.75	19145CR
13020CRM	19 0.75	19616CR
13040CR	57.2 1.50	19516CR
13040CRM	57.2 1.50	19825CR
13240CR	66.7 2.63	19381CR
13240CRM	66.7 2.63	19103CR



13020CR

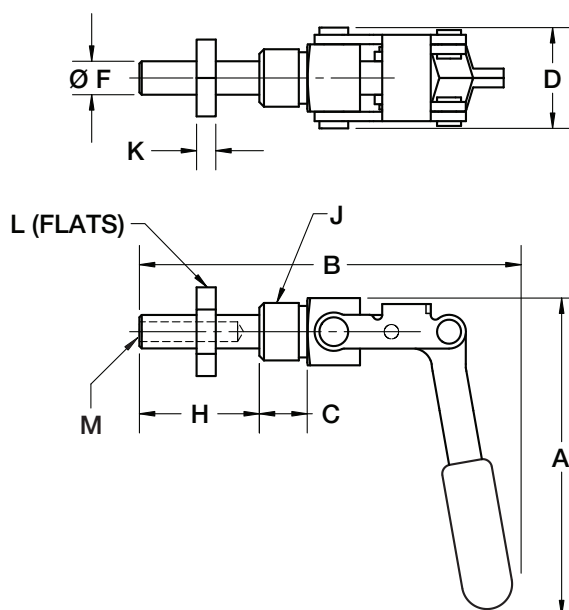


Model	Sila upnutia N	Hmotnosť Kg	Popis	A	B	C	D	F	H	J	K	L	M
mm													
13020CR	900 200	0,05 0.12	Závitové telo, Imperiálny závit	79.8 3.14	66.1 2.6	12.7 0.5	26.2 1.03	10 0.39	20.6 0.81	5/8-18	6.4 0.25	22.4 0.88	1/4 - 20
13020CRM	900 200	0,05 0.12	Závitové telo, Metrický závit	79.8 3.14	66.1 2.6	12.7 0.5	26.2 1.03	10 0.39	20.6 0.81	M16X1.5	6 0.24	24 0.94	M6
13040CR	1330 300	0,20 0.44	Závitové telo, Imperiálny závit	106.3 4.18	123.3 4.85	19.4 0.76	33.1 1.3	11.1 0.44	36.1 1.42	3/4-16	6.4 0.25	25.4 1.00	5/16 -18
13040CRM	1330 300	0,20 0.44	Závitové telo, Metrický závit	106.3 4.18	123.3 4.85	19.4 0.76	33.1 1.3	11.1 0.44	36.1 1.42	M20X1.5	6.4 0.25	30 1.18	M8
13240CR	3100 700	0.70 1.54	Závitové telo, Imperiálny závit	137.9 5.43	170.9 6.73	22.4 0.88	47.2 1.86	16 0.63	71.1 2.8	1-14	8.1 0.32	41 1.59	3/8- 16
13240CRM	3100 700	0.70 1.54	Závitové telo, Metrický závit	137.9 5.43	170.9 6.73	22.4 0.88	47.2 1.86	16 0.63	71.1 2.8	M27X2	8.1 0.32	41 1.59	M10

Model **1305**

Model	Zdvih	Prítlačná skrutka (dodávaná)
	mm/in.	
13050CR	31.8 1.25	19516CR
13050CRM	31.8 1.25	19825CR



13050CR

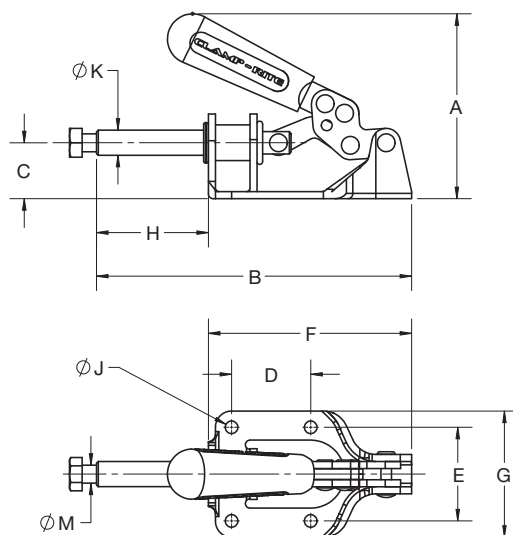


Model	Sila upnutia	Hmotnosť	Popis	A	B	C	D	E	F	G	H	J	K	M
	N	Kg		mm										
13050CR	1330	0,31	Vodorovná päťka, Imperiálny závit	83.3	138.4	24.9	35.1	41.7	90.2	56.4	48.3	5.3	11.9	5/16-18
	300	0.69		3.28	5.45	0.98	1.38	1.64	3.55	2.22	1.90	0.21	0.47	
13050CRM	1330	0,31	Vodorovná päťka, Metrický závit	83.3	138.4	24.9	35.1	41.7	90.2	56.4	48.3	5.3	11.9	M8
	300	0.69		3.28	5.45	0.98	1.38	1.64	3.55	2.22	1.90	0.21	0.47	

Model **1303**

Model	Zdvih	Prítlačná skrutka (dodávaná)
	mm/in.	
13030CR	38.1 1.25	19516CR
13030CRM	38.1 1.25	19825CR
13485CR	41.9 1.65	19381CR
13485CRM	41.9 1.65	19103CR



13030CR

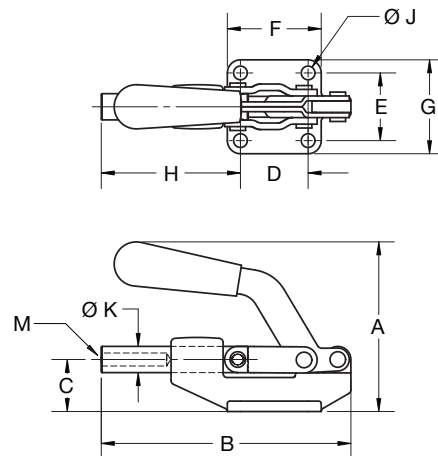


Model	Sila upnutia	Hmotnosť	Popis	A	B	C	D	E	F	G	H	J	K	M
	N	Kg		mm										
13030CR	2670	0.32	Vodorovná päťka Imperiálny závit	83.3	121.2	24.6	36.6	33.3	53.3	47.8	61.9	6.8	11.1	5/16-18
	600	0.7		3.28	4.77	0.97	1.44	1.31	2.10	1.88	2.44	0.27	0.44	
13030CRM	2670	0.32	Vodorovná päťka Metrický závit	83.3	121.2	24.6	36.6	33.3	53.3	47.8	61.9	6.8	11.1	M8
	600	0.7		3.28	4.77	0.97	1.44	1.31	2.10	1.88	2.44	0.27	0.44	
13485CR	3780	0.58	Vodorovná päťka Imperiálny závit	97	159.3	31.8	41.1	41.4	59.2	57.2	90.5	8.4	15.6	3/8-16
	850	1.28		3.82	6.27	1.25	1.62	1.63	2.33	2.25	3.56	0.33	0.62	
13485CRM	3780	0.58	Vodorovná päťka Metrický závit	97	159.3	31.8	41.1	41.4	59.2	57.2	90.5	8.4	15.6	M10
	850	1.28		3.82	6.27	1.25	1.62	1.63	2.33	2.25	3.56	0.33	0.62	

Model 1309

Model	Zdvih	Prítlačná skrutka (dodávaná)
	mm/in.	
13090CR	31.8 1.25	19516CR
13090CRM	31.8 1.25	19825CR




13090CR

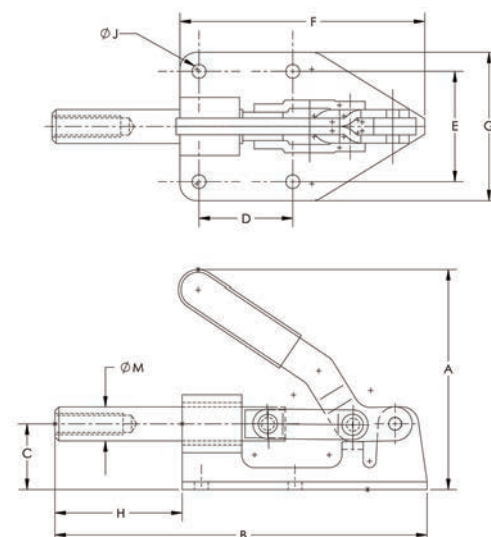


Model	Sila upnutia	Hmotnosť	Popis	A	B	C	D	E	F	G	H	J	K	M
	N	Kg												
				mm										
13090CR	1330	0,40	Vodorovná päťka, Imperiálny závit	84	138.6	24.6	35.1	41.2	91	55.5	47.6	6.8	12.7	5/16-18
	300	0.88		3.31	5.46	0.97	1.38	1.62	3.58	2.19	1.87	0.27	0.50	
13090CRM	1330	0,40	Vodorovná päťka, Metrický závit	84	138.6	24.6	35.1	41.2	91	55.5	47.6	6.8	12.7	M8
	300	0.88		3.31	5.46	0.97	1.38	1.62	3.58	2.19	1.87	0.27	0.50	

Model 1310

Model	Zdvih	Prítlačná skrutka (dodávaná)
	mm/in.	
13100CR	41.4 1.63	19381CR
13100CRM	41.4 1.63	19103CR

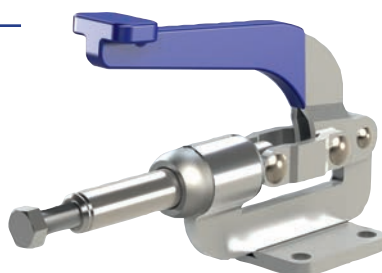


13100CR

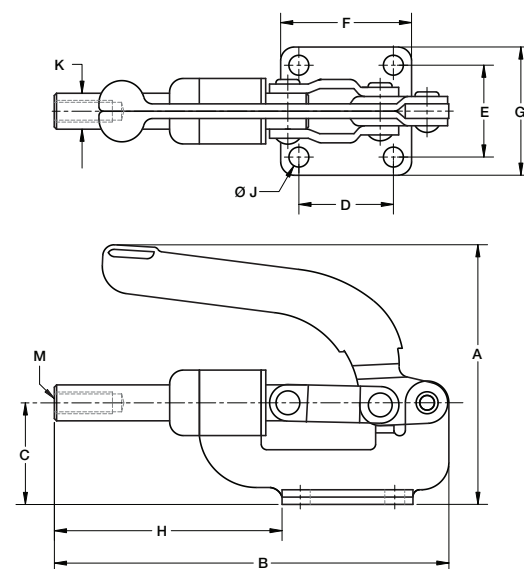

Model	Sila upnutia	Hmotnosť	Popis	A	B	C	D	E	F	G	H	J	K	M
	N	Kg												
				mm										
13100CR	3560	0.8	Vodorovná päťka, Imperiálny závit	114	173.2	44.5	41.4	40.1	57.2	55.9	90.4	8.6	15.7	3/8-16
	800	1.76		4.50	6.82	1.75	1.63	1.58	2.25	2.2	3.56	0.34	0.62	
13100CRM	3560	0.8	Vodorovná päťka, Metrický závit	114	173.2	44.5	41.4	40.1	57.2	55.9	90.4	8.6	15.7	M10
	800	1.76		5.04	6.82	1.75	1.63	1.58	2.25	2.2	3.56	0.34	0.62	

Model **1307**

Model	Zdvih mm/in.	Prítláčná skrutka (dodávaná)
13070CR	50.8 2.00	19516CR
13070CRM	50.8 2.00	19825CR
13300CR	50.8 2.00	19381CR
13300CRM	50.8 2.00	19103CR

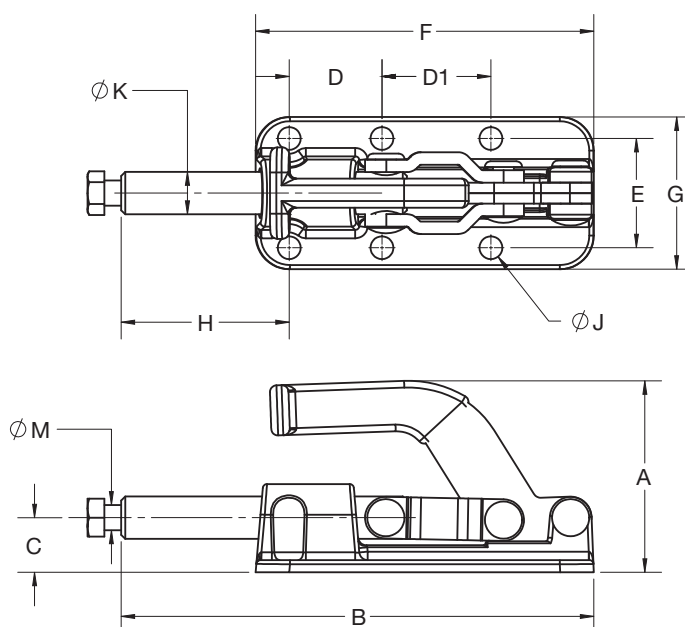


13300CR


Model	Sila upnutia N	Hmotnosť Kg	Popis	A	B	C	D	D1	E	F	G	H	J	K	M
				mm											
13070CR	3560	0.76	Vodorovná päťka, Imperiálny závit	83.3	155	17.3	35	41.1	41.1	109.2	55.4	62.7	7.1	12.5	5/16-18
	800	1.7		3.28	6.1	0.68	1.38	1.62	1.62	4.3	2.18	2.47	0.28	0.49	
13070CRM	3560	0.76	Vodorovná päťka Metrický závit	83.3	155	17.3	35	41.1	41.1	109.2	55.4	62.7	7.1	12.5	M8
	800	1.7		3.28	6.1	0.68	1.38	1.62	1.62	4.3	2.18	2.47	0.28	0.49	
13300CR	11.1kN	0.92	Vodorovná päťka, Imperiálny závit	72.3	178.6	20.6	35.1	41.1	41.3	127.8	57.5	63.5	8.6	16	3/8-16
	2500	2.06		2.85	7.03	0.81	1.38	1.62	1.63	5.03	2.27	2.50	0.34	0.63	
13300CRM	11.1kN	0.92	Vodorovná päťka. Metrický závit	72.3	178.6	20.6	35.1	41.1	41.3	127.8	57.5	63.5	8.6	16	M10
	2500	2.06		2.85	7.03	0.81	1.38	1.62	1.63	5.03	2.27	2.50	0.34	0.63	

Model 1150

Špecifikácia

Model	11501CR 11502CR	11503CR 11504CR
Uhol otvorenia ramena:	89°	74°
Uhol otvorenia rukoväte:	159°	138°

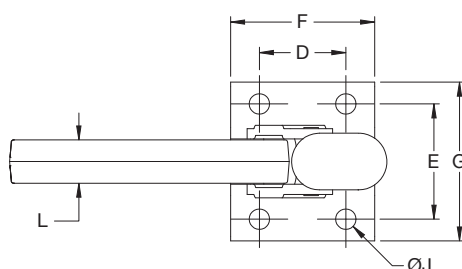
11501CR
11503CR



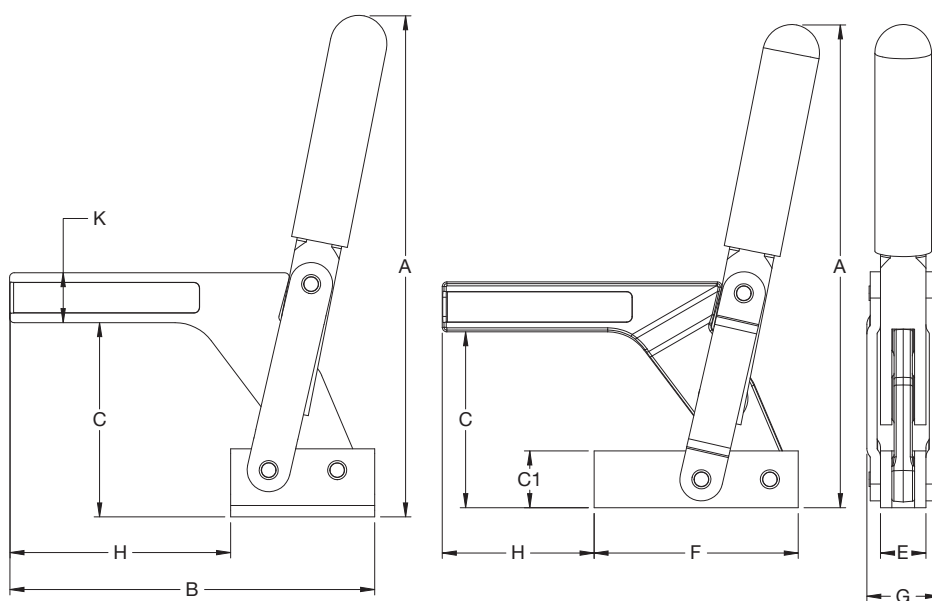
11502CR
11504CR


Model	Sila upnutia	Hmotnosť	A	B	C	C1	D	E	F	G	H	J	K	L
	N/lb.	Kg/lb.	mm/in.											
11501CR	3100	0.51	168.9	104.9	64.6	--	25.4	37	41.2	57	63.7	6.6	13	14.3
	700	1.12	6.65	4.13	2.54	--	1.00	1.46	1.62	2.24	2.51	0.26	0.51	0.56
11502CR	3100	0.48	168.9	102.7	54.3	15	--	15	63.5	25	39.2	--	13	14.3
	700	1.06	6.65	4.04	2.14	0.59	--	0.59	2.5	0.98	1.54	--	0.51	.56
11503CR	5100	1.35	220.9	160.9	85.6	--	38.1	50.8	63.5	70	97.4	9	22	19.1
	1150	2.98	8.7	6.33	3.37	--	1.50	2.00	2.50	2.76	3.83	0.35	0.87	0.75
11504CR	5100	1.34	212.8	156.9	77.5	25	--	20	90	32	66.9	--	22	19.1
	1150	2.95	8.38	6.18	3.02	0.98	--	0.79	3.54	1.26	2.63	--	0.87	0.75

Model **1159**

Špecifikácia

Model	11591CR 11592CR	11593CR 11594CR	11595CR
Uhol otvorenia ramena:	135°	132°	147°
Uhol otvorenia rukoväte:	70°	71°	74°

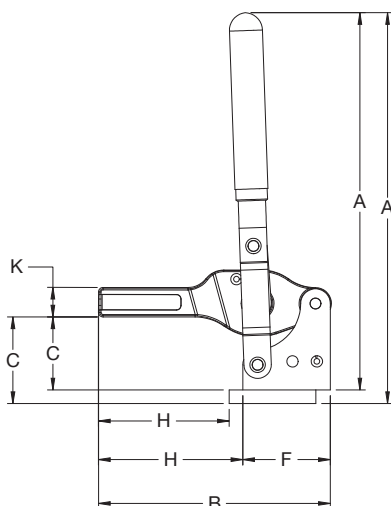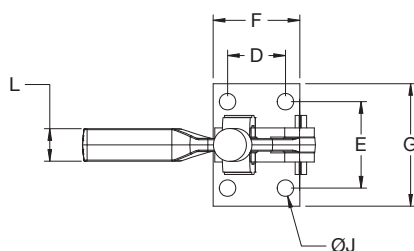
11591CR
11593CR
11595CR11592CR
11594CR

Model	Sila upnutia	Hmotnosť	A	B	C	D	E	F	G	H	J	K	L
	N/lb.	Kg/lb.	mm/in.										
11591CR	3340	0.49	172.3	101.7	38.2	25.4	38.1	38.0	54.0	57.4	7.3	13.0	14.3
	750	1.08	6.78	4.00	1.50	1.00	1.50	1.50	2.13	2.26	0.29	0.51	0.56
11592CR	3340	0.37	166.3	101.7	32.2	--	--	38.4	15.0	63.3	--	13.0	14.3
	750	0.82	6.55	4.00	1.27	--	--	1.51	0.59	2.49	--	0.51	0.56
11593CR	7120	1.29	232.7	152.5	50.5	38.1	50.8	57.0	70.0	89.2	10.5	19.0	19.0
	1600	2.84	9.16	6.00	1.99	1.50	2.00	2.24	2.76	3.51	0.41	0.75	0.75
11594CR	7120	1.02	226.7	152.5	44.5	--	--	57.1	19.0	95.4	--	19.0	19.0
	1600	2.24	8.93	6.00	1.75	--	--	2.25	0.75	3.76	--	0.75	0.75
11595CR	12230	2.92	285.7	203.0	69.3	50.8	69.9	75.0	98.5	118.5	14.0	25.4	25.4
	2750	6.44	11.25	7.99	2.73	2.00	2.75	2.95	3.88	4.66	0.55	1.00	1.00

Model 1350

Špecifikácia


Model	13501CRM 13502CRM	13503CRM 13504CRM	13505CRM 13506CRM	13507CRM 13508CRM
Zdvih:	44.5 [1.75]	25.4 [1.00]	79.5 [3.13]	48.3 [1.9]
Uhol otvorenia rukoväte:	125°	113°	139°	125°

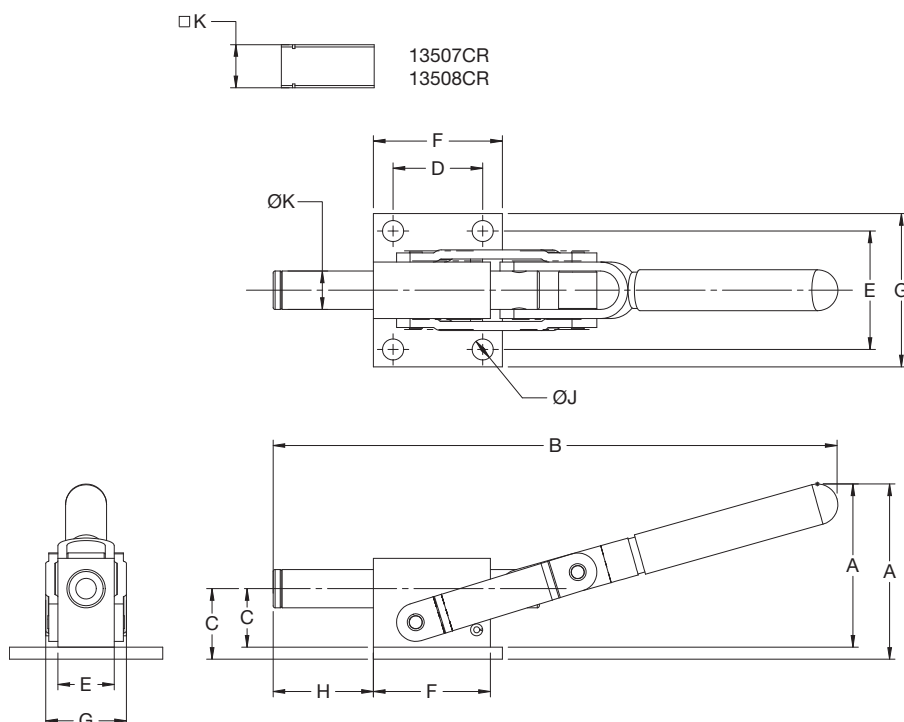

Model	Sila upnutia N/lb.	Hmotnosť Kg/lb.	A	B	C	D	E	F	G	H	J	K
			mm/in.									
13501CRM	25800	1.30	86.9	279.7	35	44.5	58.7	64	76	49.7	10.5	19
	5800	2.87	3.42	11.01	1.38	1.75	2.31	2.52	2.99	1.96	0.41	0.75
13502CRM	25800	1.09	80.9	279.7	29	--	28	58	40	49.7	--	19
	5800	2.40	3.19	11.01	1.14	--	1.10	2.28	1.57	1.96	--	0.75
13503CRM	11120	0.51	63.2	193.5	28	28.6	47.6	44	64	29.3	8.6	13
	2500	1.12	2.49	7.62	1.10	1.13	1.87	1.73	2.52	1.15	0.34	0.51
13504CRM	11120	0.39	57.2	193.5	22	--	19	38.5	29	29.3	--	13
	2500	0.85	2.25	7.62	0.87	--	0.75	1.52	1.14	1.15	--	0.51
13505CRM	20460	1.41	92.1	328.5	35	44.50	58.7	64.00	76	82.2	10.5	19.0
	4600	3.12	3.63	12.93	1.38	1.75	2.31	2.52	2.99	3.24	0.41	0.75
13506CRM	20460	1.20	86.1	328.5	29	--	28	60.50	39	82.2	--	19.0
	4600	2.65	3.39	12.93	1.14	--	1.10	2.38	1.54	3.24	--	0.75
13507CRM	25800	0.51	86.9	282.6	35	44.50	58.7	64.0	76	49.7	10.5	19.0
	5800	1.12	3.42	11.13	1.38	1.75	2.31	2.52	2.99	1.96	0.41	0.75
13508CRM	25800	0.39	80.9	282.6	29	--	28	60.50	40	49.7	10.5	19.0
	5800	0.85	3.19	11.13	1.14	--	1.1	2.38	1.57	1.96	0.41	0.75

Model **1450**

Špecifikácia

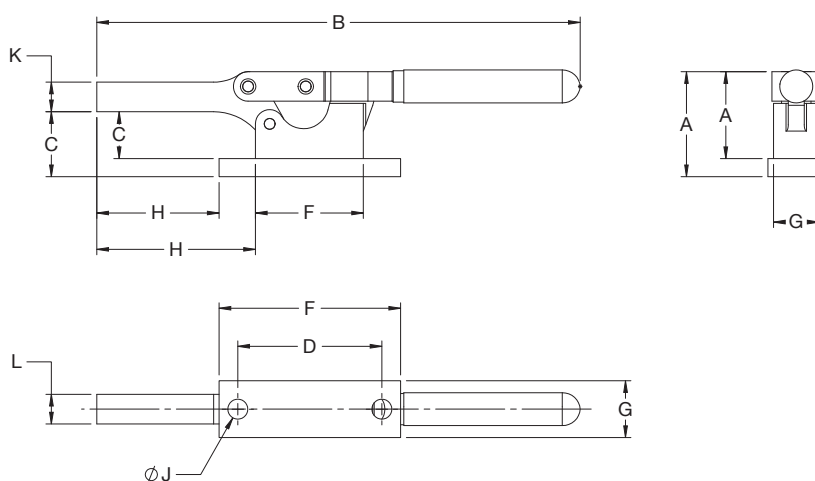Uhol otvorenia ramena: **90°**Uhol otvorenia rukoväte: **69°**14501CR
14503CR14502CR
14504CR


Model	Sila upnutia	Hmotnosť	A	B	C	D	F	G	H	J	K	L
	N/lb.	Kg/lb.	mm/in.									
14501CR	2670	0.49	47.1	213.1	28.7	63.5	80	25	69.9	8.8	13	13
	600	1.08	1.85	8.39	1.13	2.50	3.15	0.98	2.75	0.35	0.51	0.51
14502CR	2670	0.37	39.1	213.1	20.7	--	47.6	20	53.9	--	13	13
	600	0.82	1.54	8.39	0.81	--	1.87	0.79	2.12	--	0.51	0.51
14503CR	5780	1.29	59.6	279.6	33.4	92.1	117.5	38.1	66.7	10.3	19.1	20
	1300	2.84	2.34	11.01	1.32	3.63	4.63	1.5	2.63	0.41	0.75	0.79
14504CR	5780	1.02	51.6	279.6	25.4	--	66.7	28.6	92.1	--	19.1	20
	1300	2.24	2.03	11.01	1.00	--	2.63	1.13	3.63	--	0.75	0.79

Príslušenstvo




Prítlačná skrutka

Model	D	M	L	L1	Typ
mm/in.					
19218CR	16 0.63	1/4-20	54.1 2.13	40.1 1.58	B
19316CR	21 0.83	5/16-18	76.2 3.00	58.2 2.29	B
19312CR	22.2 0.88	3/8-16	89.0 3.50	63.5 2.50	B
19420CR	.8 0.31	M4X0.7	22 0.87	20 0.78	A
19525CR	10 0.39	M5X0.8	29 1.14	25 0.98	A
19836CR	19 0.75	M8X1.25	43 1.69	35 1.38	A
19630CR	16 0.63	M6X1.0	44 1.73	30 1.18	B
19835CR	21 0.83	M8X1.25	53 2.09	35 1.38	B
19055CR	26 1.02	M10X1.5	79 3.11	55 2.17	B



Štandardná nastaviteľná prítlačná skrutka


Model	D	M	L	L1
mm/in.				
19145CR	11.2 0.44	1/4-20	20.4 0.80	16 0.63
19516CR	12.7 0.50	5/16-80	31 1.22	25.4 1.00
19381CR	14.2 0.56	3/8-16	38.1 1.50	31.8 1.25
19616CR	10 0.39	M6X1.0	20 0.78	16 0.63
19825CR	13 0.51	M8X1.25	30.5 1.20	25 0.98
19103CR	17 0.67	M10X1.5	42 1.65	35 1.38

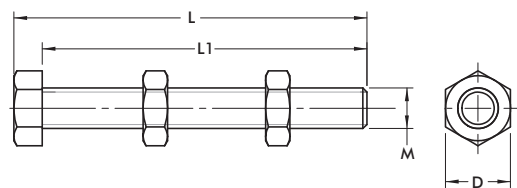

Držiak prítlačnej skrutky



Model	A	B	F1	d
mm/in.				
19516	30.5 1.20	16.3 0.64	6.4 0.25	8.1 0.32
19380	16.3 37.3	18.8 0.74	8.4 0.33	10.4 0.41
19120	43.2 1.70	30.2 1.19	9.7 0.38	17.0 0.67





Tieto produkty sú dostupné prostredníctvom:

D-S-C Slovensko, s.r.o.

Puškinova 4609/2
036 01 Martin
Slovenská republika
Tel: +421 (0)908 912 557
Fax: +421 (0)43 413 1470
Email: obchod@dscslovensko.sk
www.dscslovensko.sk



D-S-C Czech Technology, s.r.o.

Harmonická 1384/13, Stodůlky
158 00 Praha 5
Česká republika
Tel: +420 608 766 642
E-mail: info@dsczech.cz
www.dsczech.cz

www.clamp-rite.com